

NEMAL



CABLE & CONNECTORS
FOR THE ELECTRONICS INDUSTRY



[Digital Video Cables for HD | SDI]

DIGITAL VIDEO CABLES FOR HD | SDI

Key Features: 75 ohm Impedance
UL Rated CMR

High Performance with maximum flexibility



Compatible with industry standard connectors and tooling

Plenum rated versions available

Available in 10 colors at no extra cost

Available in factory standard 1000 ft rolls or in special lengths as required

Available fully terminated per customer specifications

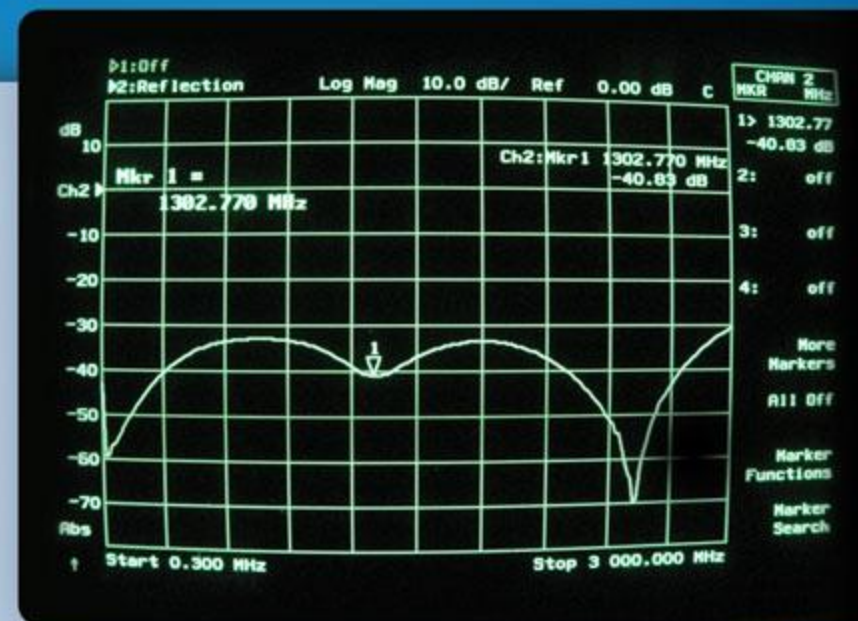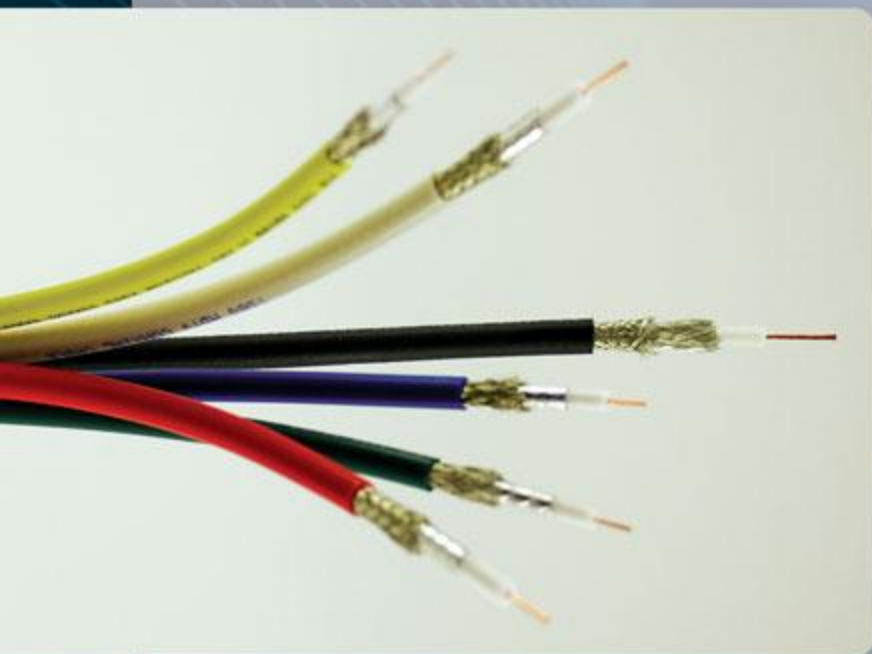

Nemal Part No.	Center Cond	Belden Ref	Dielectric	VP %	Shielding	Jacket Type	Jacket Dia in/mm	Weight/M lbs/kg	Capacitance Pf/ft	Connector Type	Nom. Attenuation db/100ft (MHZ)						
											1	10	270	500	1000	3000	4500
1191	23AWG SBC .023"	1855A	Gas Injected FHDPE	83	Foil+95% TC braid	PVC	.160/.405	9.0/4.0	16.3	NE8092H	.4	1.2	5.4	7.5	10.6	18.7	24.9
1570	20AWG SBC .032"	1505A	Gas Injected FHDPE	83	Foil+95% TC braid	PVC	.234/.59	17.6/8.1	16.3	NE8094H	.3	.9	3.9	5.3	7.7	13.5	18.1
1570F	22AWG (7/29) BC	1505F	Gas Injected FHDPE	80	(2) TC Braids 95%	PVC	.242/6.2	43.5/19.8	17.0	NE8094H	.3	.9	5.0	7.2	10.4	20.4	28.3
1580	18 AWG SBC .040"	1694A	Gas Injected FHDPE	82	Foil+95% TC braid	PVC	.275/7.0	23.0/10.5	16.3	NE8010H	.2	.7	2.8	4.1	5.9	10.6	14.8
1590	14 AWG SBC .064"	7731A	Gas Injected FHDPE	85	Foil+95% TC braid	PVC	.405/10.3	48.5/22.0	16.0	NE8089H	.2	.5	2.1	2.9	4.2	8.3	9.8